

ADG Eco Earth-Panel Flood



Application Placement


Industrial
Parking
Commercial
Retail
Showroom
Manufacturing

Use inside:
ADG Eco fixtures

ADG Eco Earth-LED 40 W

44W Low Power Consumption- Compatible with 150W Metal Halide Lamp

- **Rated Lifetime: More than 50,000 Hours**
- **High Efficiency (Max: 80lm/w)**
- **Low Temperature of Lamp Fixture through Optimum Structure (Less than 60C)**
- **Operates with Minimum Heat Build-up**
- **Beam Angle: 120°**

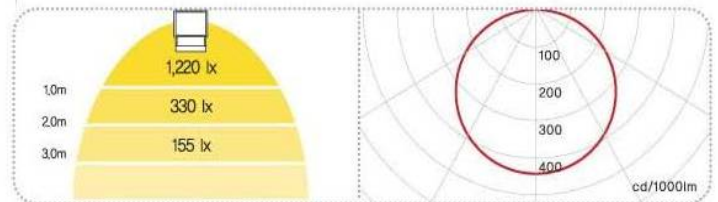

Ordering Specifications

	Classification	Symbol	L/F-44W-L (Light)	L/F-44W- N (Natural)	L/F-44W- D (Daylight)	Unit
1	Power Consumption	P		44		W
2	Input-Wattage	Vin		220		VAC
3	Power-Factor	PF		Over 0.9		
4	Luminous Flux	F	2,800(±200)	3,500(±200)	3,500(±200)@6500K	lm
5	Light Efficiency		Over 60	Over 60	Over 75	lm/W
6	Color Temperature	CCT	2,800	5,300	6,500	Kelvin
7	Color Rendering Index	Ra	Over 70 (over 92 available)			
8	Rated Life	Lt		50,000		Hrs
9	Operating Temperature	Topr		-20 ~ 50		°C
10	Beam Angle	2θ1/2		120		Deg
11	Size		212.5 (H) X 260 (V) X 108 & (W)			mm
12	Weight			2.68		kg



Cage: 59TA1 Duns:198358579 NAICS: 335129, 331724, 541420 FSC: 5975, 6210, 6240

